
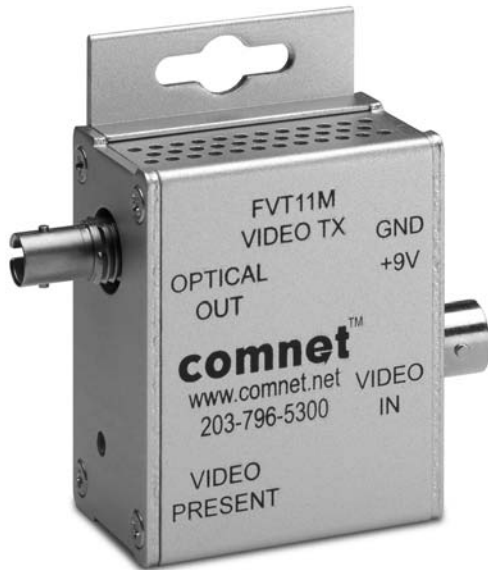


single mini video transmitter



Description

The ComNet™ FVT11M video mini-transmitter supports transmission of a fixed video signal using AM modulation on one multimode fiber optic cable. The FVT11M video transmitter is compatible with the FVR11M, FVR10M, FVR21, and FVR22 receivers. Plug-and-play design ensures ease of installation requiring no electrical or optical adjustments. The transmitter incorporates a bi-color (Red/Green) indicating LED for monitoring proper system operation.

Applications

- CCTV (Fixed Video)

Features

- AM Video Transmission
- NTSC, PAL, SECAM compatible
- Full color compatibility
- No in-field electrical or optical adjustments required
- Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
- Bi-Color (Red/Green) Video Present indicator
- Lifetime Warranty

PART NUMBER	FIBERS REQUIRED	FIBER
FVT11M	1	Multimode 62.5/125µm

specifications

VIDEO

Video Input: 1 volt pk-pk (75 ohms)
 Bandwidth: 5 Hz - 10 MHz
 Differential Gain: <5%
 Differential Phase: <5°
 Tilt: <1%
 Signal-to-Noise Ratio (SNR): 60 dB

ELECTRICAL & MECHANICAL

Power: 8-15 VDC @ 80 mA
 Max. RG59 Cable Length: 750 ft.
 Circuit Board: Meets IPC Standard
 Size (in./cm) (LxWxH): 2.3 x 1.6 x 1.1 in., (5.7 x 4.1 x 2.8 cm)
 Surface Mount:
 Shipping Weight: <1 lb./0.45 kg

WAVELENGTH

FVT11M 850 nm, Multimode

ENVIRONMENTAL

MTBF: >100,000 hours
 Operating Temp: -40° C to +75° C
 Storage Temp: -40° C to +85° C
 Relative Humidity: 0% to 95% (non-condensing)†

NUMBER OF FIBERS

1

CONNECTORS

Optical: ST
 Power: Terminal Block with Screw Clamps
 Video: BNC (Gold Plated Center-Pin)

† May be extended to condensation conditions by adding suffix '-C' to model number for conformal coating.

LED INDICATOR*

- Video Present


* LEDs: RED = "No Activity"
 GRN = "Activity"
 NOTE: RED DOES NOT MEAN "Error"



PART NUMBER	DESCRIPTION	FIBERS REQUIRED	FIBER	OPTICAL PWR BUDGET	MAX. DISTANCE**
FVT11M	Mini Video Transmitter (850 nm)	1	Multimode 62.5/125µm	14 dB	4 km (2.5 miles)
Accessories	9 Volt DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included)				
Options	Add '-C' for Conformally Coated Circuit Boards (Extra charge, consult factory)				

**Distance may be limited by optical dispersion.

Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J
 In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

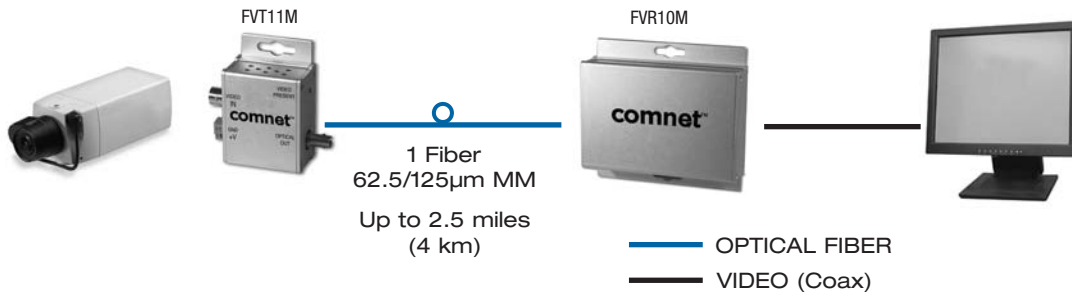

World Headquarters
 3 Corporate Drive
 Danbury, CT 06810
 T: 203-796-5300
 F: 203-796-5303
 Tech Support: 1-888-678-9427
 info@ComNet.net

ComNet Europe Ltd
 8 Turnberry Park Road
 Gildersome, Morley
 Leeds, LS27 7LE, UK
 T: +44 (0)113 307 6400
 F: +44 (0)113 253 7462
 info-europe@ComNet.net

