

dual independent am video receiver
 with automatic gain control (agc)



Description

The ComNet™ FVR22 dual video receiver detects two independent AM video signals in one module on two independent multimode fiber optic cables. The module is not a multiplexer. The module is ideal for smaller CCTV installations and the rack mount version can be used to double the fixed video capacity of the C1 rack for up to 28 independent video channels per card cage. The modules utilize Automatic Gain Control (AGC). The receiver is compatible with the ComNet FVT11M and the FVT20 dual video transmitter. Plug-and-play design ensures ease of installation. Bi-color (Red/Green) LED indicators are provided for rapidly ascertaining equipment operating status. These units are interchangeable between stand-alone or card mount configurations.

Applications

- CCTV (Fixed Video)

Features

- AM Video Receiver
- NTSC, PAL, SECAM compatible
- Full range Automatic Gain Control (AGC)
- Two independent receivers in one model
- Full color compatibility
- Can be used to double the fixed video capacity of a C1 card cage
- Plug-and-Play design for ease of installation
- No in-field electrical or optical adjustments required
- Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
- Bi-Color (Red/Green) indicating LED to monitor system performance
- Hot-Swappable rack modules
- Automatic resettable fuses on all power lines
- Lifetime Warranty

PART NUMBER	FIBERS REQUIRED	FIBER
FVR22	2	Multimode 62.5/125µm

specifications

VIDEO

Video Output: 1 volt pk-pk (75 ohms)
 Bandwidth: 5 Hz - 10 MHz
 Differential Gain: <5%
 Differential Phase: <5°
 Tilt: <1%
 Signal-to-Noise Ratio (SNR): 60 dB typical
 54 dB minimum

WAVELENGTH

FVR12 850 nm, Multimode

NUMBER OF FIBERS

2

CONNECTORS

Optical: ST
 Power: Terminal Block with Screw Clamps
 Video: BNC (Gold Plated Center-Pin)

LED INDICATORS*

* LEDs: RED = "No Activity"

GRN = "Activity"

NOTE: RED DOES NOT MEAN "Error"

- Received Video
- Transmitted Video

ELECTRICAL & MECHANICAL

Power: 8-15 VDC @ 120 mA
 Surface Mount: From Rack
 Rack: 1
 Number of Rack Slots: Automatic Resettable
 Current Protection: Solid-State Current Limiters
 Meets IPC Standard
 Circuit Board: Meets IPC Standard
 Size (in./cm) (LxWxH): 6.1 x 5.3 x 1.1 in.,
 (15.5 x 13.5 x 2.8 cm)
 Surface Mount: <2 lb./0.9 kg
 Shipping Weight:

ENVIRONMENTAL

MTBF: >100,000 hours
 Operating Temp: -40° C to +75° C
 Storage Temp: -40° C to +85° C
 Relative Humidity: 0% to 95% (non-condensing)†

† May be extended to condensation conditions by adding suffix '-C' to model number for conformal coating.





PART NUMBER	DESCRIPTION	FIBERS REQUIRED	FIBER	OPTICAL PWR BUDGET	MAX. DISTANCE**
FVR22	AGC Dual Video Receiver (850 nm)	2	Multimode 62.5/125µm	14 dB	4 km (2.5 miles)

Accessories	9 Volt DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included)
Options	Add '-C' for Conformally Coated Circuit Boards (Extra charge, consult factory)

**Distance may be limited by optical dispersion.

Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J
 In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

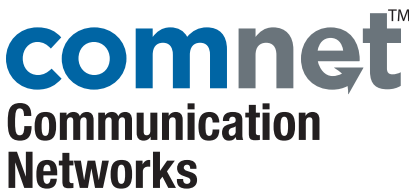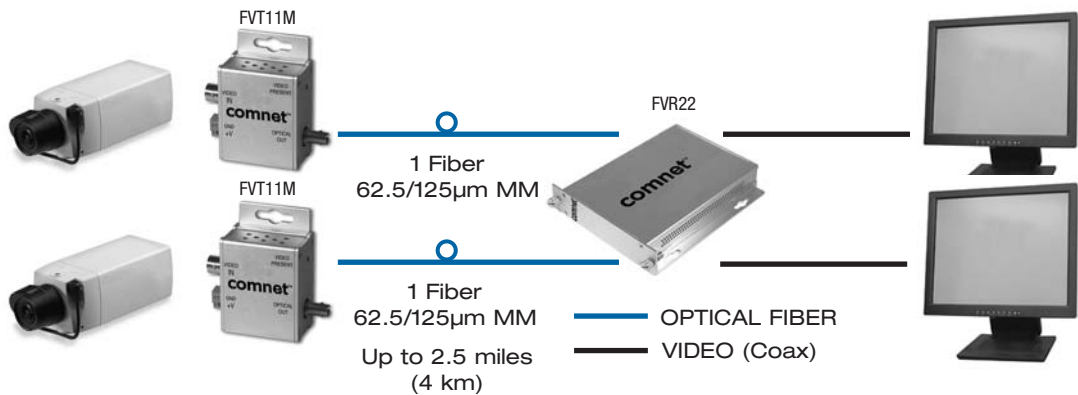

World Headquarters
 3 Corporate Drive
 Danbury, CT 06810
 T: 203-796-5300
 F: 203-796-5303
 Tech Support: 1-888-678-9427
 info@ComNet.net

ComNet Europe Ltd
 8 Turnberry Park Road
 Gildersome, Morley
 Leeds, LS27 7LE, UK
 T: +44 (0)113 307 6400
 F: +44 (0)113 253 7462
 info-europe@ComNet.net

